

Data sheet

valid from: 4/6/26



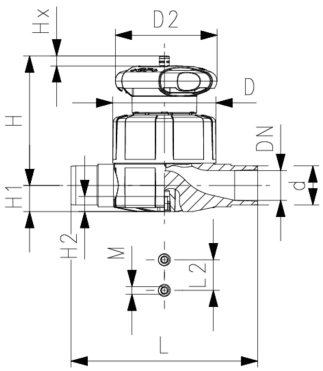

Diaphragm valve type 515 PVC-C
With solvent cement spigots metric

Model:

- Double flow rate compared to predecessor
- One housing nut replaces four screws
- Handwheel with built-in locking mechanism
- Overall length EN 558

Option:

- Individual configuration of the valve
- Self adjusting multifunctional module with integrated limit switches

* O-Ring material: FKM

d (mm)	DN (mm)	Size (inch)	PN (bar)	kv-value (Δp=1 bar) (l/min)	EPDM Code	SP	Weight (kg)	PTFE/EPDM Code	SP	Weight (kg)
20	15	½	10	125	**163 515 012**	1	0.344	**163 515 032**	1	0.344
25	20	¾	10	271	**163 515 013**	1	0.361	**163 515 033**	1	0.364
32	25	1	10	481	**163 515 014**	1	0.589	**163 515 034**	1	1.073
40	32	1 ¼	10	759	**163 515 015**	1	1.269	**163 515 035**	1	1.290
50	40	1 ½	10	1263	**163 515 016**	1	2.314	**163 515 036**	1	2.343
63	50	2	10	1728	**163 515 017**	1	3.054	**163 515 037**	1	3.082

d (mm)	D (mm)	D2 (mm)	H (mm)	H1 (mm)	H2 (mm)	L (mm)	L2 (mm)	M	Lift = Hx (mm)	closest inch (inch)
20	65	65	73	14	12	124	25	M6	7	½
25	80	65	81	18	12	144	25	M6	10	¾
32	88	87	107	22	12	154	25	M6	13	1
40	101	87	115	26	15	174	45	M8	15	1 ¼
50	117	135	148	32	15	194	45	M8	19	1 ½
63	144	135	166	39	15	224	45	M8	25	2

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/SwitzerlandPhone +41 -(0)52-631 1111e-mail: info.ps@georgfischer.comInternet: http://www.gfps.com