

Data sheet

valid from: 8/26/26



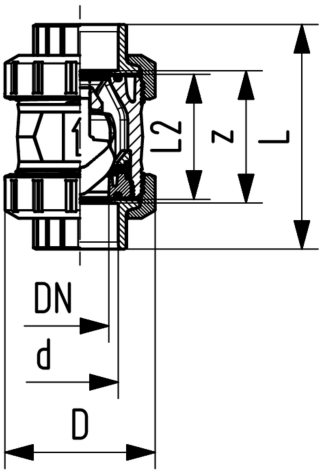

PROGEF Standard
Check valve type 562
With fusion sockets metric

Model:

- Material: PP-H
- For horizontal or vertical installation
- Sealing at a minimum water column of 1m
- Spring loaded, spring made of stainless steel (1.4310)
- Spring available in other materials, see spare parts
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimised return cone, double guided
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360
- New DN65-DN100

d (mm)	DN (mm)	PN (bar)	kv-value (Δp=1 bar) (l/min)	EPDM Code	Weight (kg)	FKM Code	Weight (kg)
16	10	10	190	**167 562 001**	0.080	**167 562 011**	0.080
20	15	10	180	**167 562 002**	0.080	**167 562 012**	0.080
25	20	10	380	**167 562 003**	0.170	**167 562 013**	0.180
32	25	10	460	**167 562 004**	0.190	**167 562 014**	0.190
40	32	10	850	**167 562 005**	0.330	**167 562 015**	0.340
50	40	10	1080	**167 562 006**	0.480	**167 562 016**	0.480
63	50	10	1670	**167 562 007**	0.880	**167 562 017**	0.880
75	65	10	2950	**167 562 008**	2.300	**167 562 018**	2.310
90	80	10	3600	**167 562 009**	3.560	**167 562 019**	3.580
110	100	10	4150	**167 562 010**	5.900	**167 562 020**	5.930

d (mm)	D (mm)	L (mm)	L2 (mm)	z (mm)	closest inch (inch)
16	50	93	56	67	⅜
20	50	95	56	66	½
25	58	109	65	77	¾
32	68	119	71	83	1
40	84	135	85	99	1 ¼
50	97	147	89	105	1 ½
63	124	168	101	117	2
75	166	233	136	167	2 ½
90	200	254	141	180	3
110	238	301	164	215	4

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: http://www.gfps.com