

Data sheet

valid from: 4/7/26



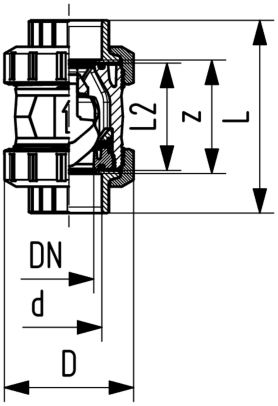

Check valve type 561 ABS
With solvent cement sockets metric

Model:

- Sealing at a minimum water column of 2 m
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimised return cone, double guided
- For vertical installation
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360
- New DN65-DN100

d (mm)	DN (mm)	Size (inch)	PN (bar)	kv-value (Δp=1 bar) (l/min)	EPDM Code	SP	Weight (kg)
16	10	⅜	10	190	**169 561 001**	1	0.090
20	15	½	10	180	**169 561 002**	1	0.090
25	20	¾	10	380	**169 561 003**	1	0.190
32	25	1	10	460	**169 561 004**	1	0.220
40	32	1 ¼	10	850	**169 561 005**	1	0.380
50	40	1 ½	10	1080	**169 561 006**	1	0.560
63	50	2	10	1670	**169 561 007**	1	0.990
75	65	2 ½	10	2950	**169 561 008**	1	2.420
90	80	3	10	3600	**169 561 009**	1	3.870
110	100	4	10	4150	**169 561 010**	1	6.240

d (mm)	D (mm)	L (mm)	L2 (mm)	z (mm)	closest inch (inch)
16	50	92	56	64	⅜
20	50	95	56	64	½
25	58	110	65	72	¾
32	68	123	71	79	1
40	84	146	85	94	1 ¼
50	97	157	89	95	1 ½
63	124	183	101	107	2
75	166	233	136	144	2 ½
90	200	254	141	151	3
110	238	301	164	174	4

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/SwitzerlandPhone +41 -(0)52-631 1111e-mail: info.ps@georgfischer.comInternet: http://www.gfps.com