
Data sheet


valid from: 4/7/26



Check valve type 562 ABS
With solvent cement sockets Inch BS

Model:

- For horizontal or vertical installation
- Sealing at a minimum water column of 1m
- Spring loaded, spring made of stainless steel (1.4310)
- Spring available in other materials, see spare parts
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimised return cone, double guided
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360
- New DN65-DN100

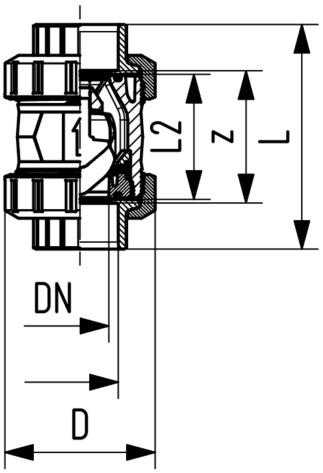

d (mm)	Size (inch)	DN (mm)	PN (bar)	kv-value (Δp=1 bar) (l/min)	EPDM Code	SP	Weight (kg)	D (mm)	L (mm)	L2 (mm)	z (mm)
16	⅜	10	10	190	**169 562 061**	1	0.090	50	92	56	60
20	½	15	10	180	**169 562 062**	1	0.090	50	95	56	60
25	¾	20	10	380	**169 562 063**	1	0.190	58	110	65	69
32	1	25	10	460	**169 562 064**	1	0.210	68	123	71	75
40	1 ¼	32	10	850	**169 562 065**	1	0.370	84	146	85	89
50	1 ½	40	10	1080	**169 562 066**	1	0.570	97	157	89	97
63	2	50	10	1670	**169 562 067**	1	1.000	124	183	101	110
75	2 ½	65	10	2950	**169 562 068**	1	2.420	166	233	136	144
90	3	80	10	3600	**169 562 069**	1	3.890	200	254	141	151
110	4	100	10	4150	**169 562 070**	1	6.140	238	301	164	174

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/SwitzerlandPhone +41 -(0)52-631 1111e-mail: info.ps@georgfischer.comInternet: http://www.gfps.com