

Data sheet

valid from: 3/27/26



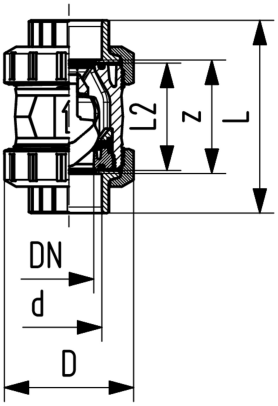

Check valve type 562 ABS
With solvent cement sockets metric

Model:

- For horizontal or vertical installation
- Sealing at a minimum water column of 1m
- Spring loaded, spring made of stainless steel (1.4310)
- Spring available in other materials, see spare parts
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimised return cone, double guided
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360
- New DN65-DN100

d (mm)	DN (mm)	PN (bar)	kv-value (Δp=1 bar) (l/min)	EPDM Code	SP	Weight (kg)	D (mm)	L (mm)	L2 (mm)	z (mm)	closest inch (inch)
16	10	10	190	**169 562 001**	1	0.090	50	92	56	64	⅜
20	15	10	180	**169 562 002**	1	0.090	50	95	56	64	½
25	20	10	380	**169 562 003**	1	0.190	58	110	65	72	¾
32	25	10	460	**169 562 004**	1	0.220	68	123	71	79	1
40	32	10	850	**169 562 005**	1	0.380	84	146	85	94	1 ¼
50	40	10	1080	**169 562 006**	1	0.560	97	157	89	95	1 ½
63	50	10	1670	**169 562 007**	1	0.990	124	183	101	107	2
75	65	10	2950	**169 562 008**	1	2.420	166	233	136	144	2 ½
90	80	10	3600	**169 562 009**	1	3.870	200	254	141	151	3
110	100	10	4150	**169 562 010**	1	6.240	238	301	164	174	4

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/SwitzerlandPhone +41 -(0)52-631 1111e-mail: info.ps@georgfischer.comInternet: http://www.gfps.com