
Data sheet

valid from: 4/2/26



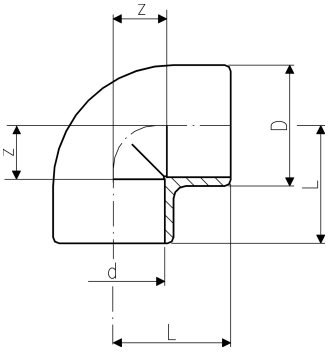

Elbow 90° ABS metric

- >d225 - maximum operating temperature: +40°C

	d (mm)	Size (inch)	PN (bar)	Code	SP	Weight (kg)	D (mm)	L (mm)	z (mm)	closest inch (inch)
	20		16	**729 100 106**	10	0.010	26	27	11	½
	25		16	**729 100 107**	10	0.018	31	33	14	¾
	32		10	**729 100 108**	10	0.033	40	39	17	1
	40		10	**729 100 109**	10	0.055	49	47	21	1 ¼
	50		10	**729 100 110**	10	0.098	61	57	26	1 ½
	63		10	**729 100 111**	10	0.186	76	72	33	2
*	75	2 ½	10	**729 100 112**	5	0.300	90	84	40	2 ½
	90		10	**729 100 113**	5	0.432	110	97	46	3
	110		10	**729 100 114**	3	0.769	136	116	55	4
*	140	5	10	**729 100 116**	8	1.258	162	146	70	5
	160		10	**729 100 117**	1	2.209	185	166	80	6
	200		10	**729 100 119**	1	3.372	225	207	101	8
		½	15	**729 101 106**	10	0.017	28	30	13	
		¾	15	**729 101 107**	10	0.027	34	37	16	
		1	15	**729 101 108**	10	0.033	40	42	19	
		1 ¼	15	**729 101 109**	10	0.060	52	51	22	
		1 ½	15	**729 101 110**	10	0.090	58	56	26	
		2	15	**729 101 111**	10	0.162	73	68	32	
		3	15	**729 101 113**	5	0.444	107	97	46	
		4	15	**729 101 115**	2	1.008	137	122	59	

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/SwitzerlandPhone +41 -(0)52-631 1111e-mail: info.ps@georgfischer.comInternet: http://www.gfps.com